













# AC 226

## Self Contained Ice Machine up to 150 kg

Item #:
Project:
Quantity:

	<p><b>FEATURES</b></p> <ul style="list-style-type: none"> <li>• Produces individual Gourmet crystal clear ice cubes.</li> <li>• Resistant stainless steel exterior.</li> <li>• Advanced diagnostics Computerized control.</li> <li>• Front panel in and out airflow (air-cooled model only) for built-in installation.</li> <li>• Front access condenser air filter, removable and washable (air cooled version only).</li> <li>• Easily accessible front panel mount ON-OFF Switch.</li> <li>• Routine maintenance visible alarm light on front panel.</li> <li>• Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.</li> </ul>																	
 <p>AC L 226 Large Gourmet 39 g Ø 38 x H 41 mm</p>  <p>AC M 226 Medium Gourmet 20 g Ø 30 x H 34 mm</p>  <p>AC S 226 Small Gourmet 8 g Ø 21 x H 25 mm</p>	<p><b>CONDENSING SYSTEM</b></p> <p>Air cooled Water cooled</p>	<p><b>INTERNAL BIN CAPACITY</b></p> <p>70 kg</p>																
	<p><b>REFRIGERANT GAS</b></p> <p>R404A</p>	<p><b>OPERATING REQUIREMENTS</b></p> <table border="1"> <thead> <tr> <th></th> <th>Minimum</th> <th>Maximum</th> </tr> </thead> <tbody> <tr> <td>Air temperature</td> <td>10°C</td> <td>43°C</td> </tr> <tr> <td>Water temperature</td> <td>5°C</td> <td>38°C</td> </tr> <tr> <td>Water pressure</td> <td>1 bar (14 psi)</td> <td>5 bar (70 psi)</td> </tr> <tr> <td>Electrical voltage</td> <td>-10%</td> <td>+10%</td> </tr> </tbody> </table>			Minimum	Maximum	Air temperature	10°C	43°C	Water temperature	5°C	38°C	Water pressure	1 bar (14 psi)	5 bar (70 psi)	Electrical voltage	-10%	+10%
	Minimum	Maximum																
Air temperature	10°C	43°C																
Water temperature	5°C	38°C																
Water pressure	1 bar (14 psi)	5 bar (70 psi)																
Electrical voltage	-10%	+10%																
<p><b>VOLTAGE V/Hz/ph</b></p> <p>230/50/1 230/60/1</p>																		
<p>Certifications:</p> <div style="display: flex; justify-content: space-around; align-items: center;">         </div>																		

Self Contained Ice Machine up to 150 kg

**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice  
[Apple store](#)  
[Google play](#)  
[Windows store](#)







[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

# AC 226

Self Contained Ice Machine up to 150 kg


Item #:
Project:
Quantity:

Self Contained Ice Machine up to 150 kg

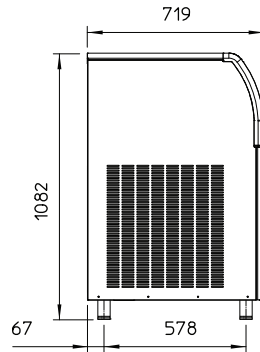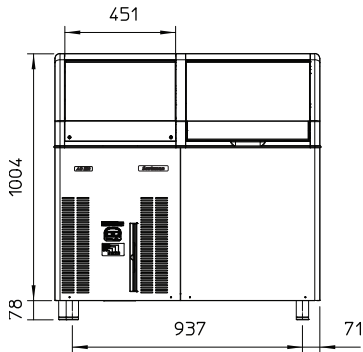

UNIT OF MEASUREMENT: mm

1. 3/4" OD - OVERFLOW DRAIN
2. 3/4" GAS - WATER INLET
3. 3/4" GAS - WATER OUTLET  
WATER COOLED UNIT ONLY
4. 3/4" GAS - WATER INLET  
WATER COOLED UNIT ONLY
5. CORD SET

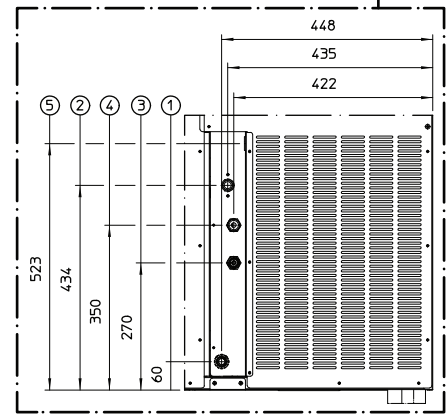

UNIT DATA		Compressor		Circuit wires		Max. fuse size		
		Version	Voltage	Btu/h	W	No.	Ømm <sup>2</sup>	A
Size (W x D x H)	1078 x 715 x 1082 mm	AC L 226 AS	230/50/1	9042	2650	3	1.5	16
Net weight	96 kg	AC L 226 WS	230/50/1	9042	2650	3	1.5	16
SHIPPING DATA		AC M 226 AS	230/50/1	9042	2650	3	1.5	16
		AC M 226 WS	230/50/1	9042	2650	3	1.5	16
		AC S 226 AS	230/50/1	9042	2650	3	1.5	16
		AC S 226 WS	230/50/1	9042	2650	3	1.5	16
Carton (W x D x H)	1150 x 780 x 1160 mm	AC L 226 AS	230/60/1	10578	3100	3	1.5	16
Weight	110 kg	AC L 226 WS	230/60/1	9042	2650	3	1.5	16
		AC M 226 AS	230/60/1	10578	3100	3	1.5	16
		AC M 226 WS	230/60/1	10578	3100	3	1.5	16

Version	Condensation	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
			10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
AC L 226 AS	Air	230/50/1	134	128	101	23.6	23.7	11.3	1150
AC L 226 WS	Water	230/50/1	150	130	100	15.0	19.5	141.7	800
AC M 226 AS	Air	230/50/1	145	142	110	22.0	24.2	13.8	1150
AC M 226 WS	Water	230/50/1	150	147	130	14.8	19.2	139.2	800
AC S 226 AS	Air	230/50/1	145	140	110	22.5	24.7	16.7	1150
AC S 226 WS	Water	230/50/1	145	140	110	22.5	24.7	16.7	1300
AC L 226 AS	Air	230/60/1	147	143	114	23.3	26.4	13.1	1150
AC L 226 WS	Water	230/60/1	147	143	114	23.3	26.4	141.7	1150
AC M 226 AS	Air	230/60/1	145	142	110	25.6	28.1	15.8	1150
AC M 226 WS	Water	230/60/1	145	142	110	25.6	28.1	139.2	1150

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions